


**CWF
Flooring
Inc.**

Multi-Lock Interlocking PVC Tile System

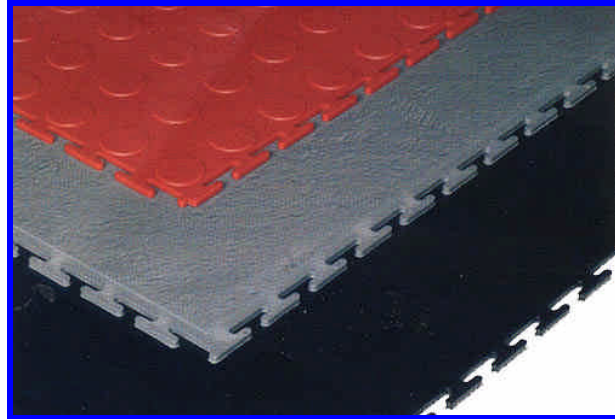

Manufactured from rugged and resilient PVC, Multi-Lock is an injection molded solid vinyl tile.

A modular replacement floor system that quickly restores and enhances surface appearance hiding unsightly stains and minor cracks in concrete floors.

Whether in large Industrial sites or smaller public spaces, Multi-Lock offer rapid surface installation and exceptional durability in high traffic or heavy load conditions.

<p>Factory corridors Entrance halls Showers Work stations Hobby shops</p>	<p>Commercial Industrial Residential</p>	<p>Patios Gym/Fitness centers Garages Laundry Rooms Marinas</p>
<p>Multi-Lock is available in 3 different surfaces:</p> <p>Coin - Standard raised medallion motif Slate - Simulated slate pattern Smooth - Flat surface with a textured mat finish</p>		<p>Measurements: 19 5/8" x 19 5/8" [50cm x 50cm] - Area: Each tile covers 2.6ft² Thickness: 5/16" or 3/16" Weight per tile: 5/16" 3.85lbs [1.75kg] / 3/16" 3.55lbs [1.60kg] Packaging: 5/16" 12 tiles per box / 3/16" 15 tiles per box Function: 5/16" heavy weight load traffic (Ribbed Bottom) 3/16" high foot traffic (Flat bottom)</p>

CWF Flooring, Inc. 1150 S. Lake Street, Suite 17 Los Angeles, CA 90006 USA
Tel. 213-380-7655, 213-380-6682 Fax 213-947-1598
Web: www.Cartwheelfactory.com Email: Sales@Cartwheelfactory.com

**CWF
Flooring
Inc.**

Multi-Lock Interlocking PVC Tile System



**CWF Flooring, Inc. 1150 S. Lake Street, Suite 17 Los Angeles, CA 90006 USA
Tel. 213-380-7655, 213-380-6682 Fax 213-947-1598
Web: www.Cartwheelfactory.com Email: Sales@Cartwheelfactory.com**

CWF Flooring, Inc.

...a world of mats and more!

1150 S. Lake Street, Ste. 17 Los Angeles, CA 90006 USA
Tel. 1-213-380-7655 Fax 1-213-947-1598 Email: Sales@CartwheelFactory.com

WARRANTY

Multi-Lok Tiles

Note: Colored tiles are made from virgin material. Black & gray are made from recycled materials which may vary from shipment to shipment and the following specifications are therefore a median description only. Actual specifications with regard to density, brittleness, elongation and tensile strength may vary as much as 15% above or below the median figures represented below.

Material: 100% Recycled cable grade PVC with UV stabilizers

Size: 19 5/8" x 19 5/8". Effective size 2.6 sqft/tile

Thickness: Approximately 5/16th

Weight: 3.75 lbs

Colors: Navy Blue, Royal Blue, Forest Green, Yellow, Dark Gray, Light Gray, Red, Black

Density (ASTM D792-88): 1.3gram/cc

Brittleness/Temp (ASTM D745-73): -24 degrees C

Elongation (ASTM D638-77): 350%

Tensile Strength (ASTM D2863-77) 2000 psi

Flame Resistant (ASTM 648 - class 2, MFA 253, NBSIR 75-950): Yes

Waterproof: Yes

Also resistant to: Oil, gasoline, most solvents, caustics, mold, mildew, water, ozone abrasion aging.

Retards development of bacteria.

**Color and tensile strength not effected by heat, cold, humidity or sunlight (except red).*