


ASTM SWITCHBOARD Rubber Insulating Mats



20,000 VAC
Dielectric Test Voltage

CWF Flooring, Inc.
www.CartwheelFactory.Com

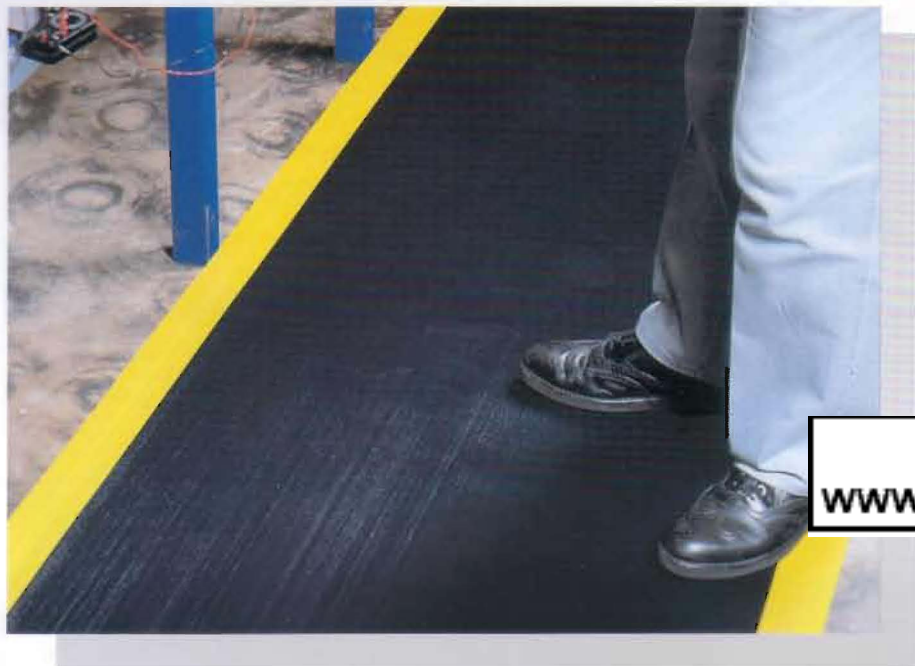

30,000 VAC
Dielectric Test Voltage



40,000 VAC
Dielectric Test Voltage



50,000 VAC
Dielectric Test Voltage

CORRUGATED SWITCHBOARD MATTING

- A specially compounded non-conductive corrugated matting designed to help prevent electric shock around high voltage electrical equipment, such as fuse boxes, and control panels.
- Now meets all optional requirements for Ozone Resistance, Flame Resistance, and Oil Resistance.
- Tested to ASTM D178/ANSI J6.7. Certification engraved on back.

CLASS 1 - 3/16" Thick Switchboard

• DIELECTRIC TEST VOLTAGE	20,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	10,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	7,500 VAC
Stock #	Size
SB336	3' x 75'
Weight/Ln.Ft.	3.9 lbs.

Color: Black. Sold in full rolls only.

CLASS 2 - 1/4" Thick Switchboard

• DIELECTRIC TEST VOLTAGE	30,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	20,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	17,000 VAC
Stock #	Size
SB424	2' x 75'
SB436	3' x 75'
SB448	4' x 75'
Weight/Ln.Ft.	3.5 lbs.
	5.2 lbs.
	6.8 lbs.

Color: Black, Black/Yellow 36" and 48" only.

CLASS 3 - 3/8" Thick Switchboard

• DIELECTRIC TEST VOLTAGE	40,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	30,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	26,500 VAC
Stock #	Size
SB536	3' x 45'
Weight/Ln.Ft.	7.7 lbs.


Color: Black. Sold in full rolls only.

CLASS 4 - 1/2" Thick Switchboard

• DIELECTRIC TEST VOLTAGE	50,000 VAC
• PROOF TESTED OVER ENTIRE SURFACE AT	40,000 VAC
• RECOMMENDED MAXIMUM USE VOLTAGE	36,000 VAC
Stock #	Size
SB636	3' x 30'
Weight/Ln.Ft.	10.7 lbs.

Color: Black. Sold in full rolls only.

MIL-SPEC SWITCHBOARD Mats

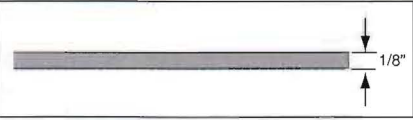

SMOOTH TOP SWITCHBOARD MATTING

- Conforms to MIL SPEC. MIL-DTL-15562G, Type II.
- This specification is approved for use by all interested Commands of the Department of the Navy and the Marine Corps and is available for use by all other Departments and Agencies of the Department of Defense.
 - Dielectric Test Voltage 30,000 VAC
 - Proof Tested Over Entire Surface At 15,000 VAC
 - Recommended Maximum Use Voltage 3,000 VAC

SMOOTH TOP SWITCHBOARD MATTING

Stock No.	Size	Weight/per roll
SSB36	1/8" x 36" x 75'	245.00 lbs
Color: Black, Blue, Green. Full rolls only.		



DIAMOND SWITCHBOARD MATTING

- Conforms to MIL SPEC. MIL-DTL-15562G, Type III.
- This specification is approved for use by all interested Commands of the Department of the Navy and the Marine Corps and is available for use by all Departments and Agencies of the Department of Defense.
 - Dielectric Test Voltage 30,000 VAC
 - Proof Tested Over Entire Surface At 15,000 VAC
 - Recommended Maximum Use Voltage 3,000 VAC

DIAMOND SWITCHBOARD MATTING

Stock No.	Size	Weight/per roll
DSB36	3/16" x 36" x 75'	252.00 lbs.
Color: Gray. Full rolls only.		

SAFETY-KNEEZ™ Kneeling Mat

SAFETY-KNEEZ™ KNEELING MAT

- Safety Kneez kneeling mat is a heavy duty industrial grade occupational health accessory for jobs such as carpet layers, electricians, plumbers, technicians and mechanics, Safety Kneez ¾" thick closed cell sponge top is soft and compliant, providing ergonomic relief by dissipating the body weight over a much larger area of the knee.
- The ¼" thick knobbed bottom layer for use in wet environments.
- On steel, concrete and grating, providing that extra measure of slip resistance and protection against sharp objects, rocks and glass.
- Reduce the knee pain associated with "on the go jobs". Safety-Kneez kneeling Mats with their exclusive knobbed backed design and super soft sponge top far exceeds the competition and provides excellent durability in the most rigorous manufacturing environment.



CWF Flooring, Inc.
www.CartwheelFactory.Com



View of knobbed underside for use in wet environments

SAFETY-KNEEZ KNEELING MAT

Stock No.	Sizes	Weight
SK1618	16" x 18" x 1"	2.5 lbs.
Color: Black		